

Full Waveguide W-Band Power Amplifier AFB-W20HP-0X



The AFB series low noise amplifiers are constructed with MMIC PHEMT devices and provide state-of-the-art broadband performances.

Application

- Telecommunication
- Test instrumentation
- Transceiver subassemblies



Specifications

- Frequency: 75.0 - 100.0 GHz
- Gain: 20 dB nominal
- Power P1: 13.0 dBm (typ) / 10.0 dBm (min)
- I/O VSWR: 3.0:1 (typ)
- DC bias: 8-12 V / 250 mA nominal
- I/O connectors: WR-10 with UG387/U-M flange
- Operating temperature: -40°C to +50°C

Features

- Super broadband performance with gain choice
- Offering high power across the entire W-band
- Single DC power supply/internal regulated sequential biasing
- Compact size and light weight
- Variable I/O interface options

Outline Drawings

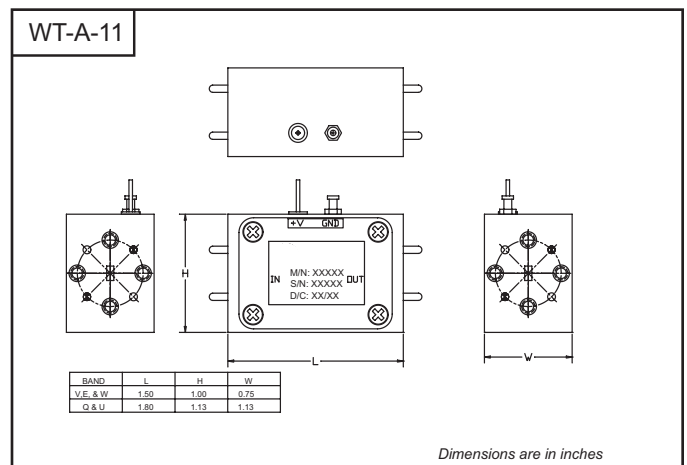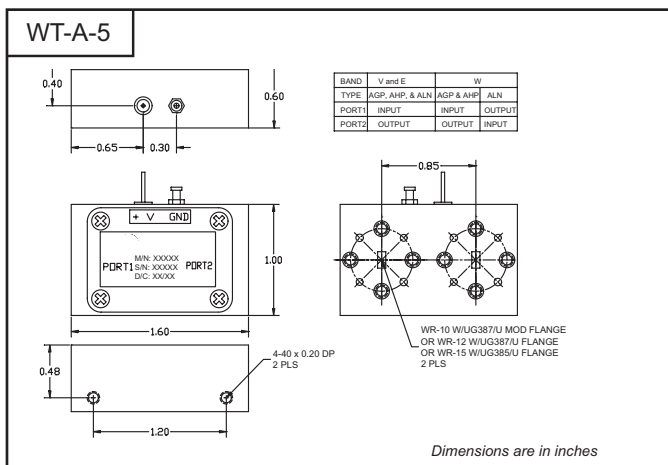

All specifications are subject to change without notice.

For more information, contact our sales team at 310.513.7000 or rfsales@ducommun.com