


# ***Part Number: 30296,30268 Microlites***



## **MICROLITES P/N 30295**


MOUNTING HOLE  
 $.193 \pm .005$

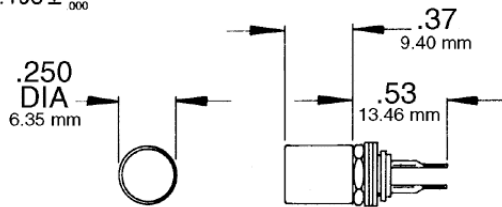

## **P/N 30268**

MOUNTING HOLE  
 $.251 \pm .003$  DIA HOLE OR  $.226 \pm .003$  D PATTERN

### **CAP STYLES**

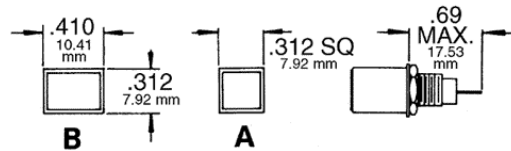

### *Electrical Options*

- **1 Lamp**

### *Switch Options*

- **Indicator**

### *Lighting Options*

- **Lit / Hidden Characters**
- **Lighted Background**
- **NVIS**

### *Mechanical Options*

- **Solder Termination**
- **Front Re-Lamping**
- **Mounting: Round / D**

### *Environmental Options*

- **EMI**
- **MIL-S-22885**

#### ***Ducommun Technologies, Inc.***

23301 Wilmington Avenue Carson, CA 90745

PH: (310) 513-7200 FAX: (310) 513-7298

[Sales@ductech.com](mailto:Sales@ductech.com) [WWW.DUCTECH.COM](http://WWW.DUCTECH.COM)

## **Re-Lampable Miniature Indicator Light**

This unique Microlite features a square or rectangular lamp capsule. Re-lamping is accomplished by removing the plug-in lamp capsule and removing the lamp from the indicator body. Lamp used is a T1 bi-pin type available in 2.5V, 28V and four ranges of 5V.

### **Special Features:**

Unit mounts from rear of panel, re-lampable from the front of panel.

Mounts in panels up to 3/16 inch thick.

Standard 10-32 thread.

May be supplied with EMI screen

Alodine aluminum housing standard, black finish also available.

Available with Display Data and a variety of illumination colors.

### **Mechanical:**

Vibration: 10 to 500 Hz

Shock: Per MIL-L-3661, Method 1

Seal: Drip proof per MIL-L-3661

Sand and dust: Per MIL-L-3661

Salt spray: 96 hours

Temperature range: -55°C to +71C

Mounting torque: 2 to 3 in-lbs.

### ***Ducommun Technologies, Inc.***

23301 Wilmington Avenue Carson, CA 90745

PH: (310) 513-7200 FAX: (310) 513-7298

[Sales@ductech.com](mailto:Sales@ductech.com) [WWW.DUCTECH.COM](http://WWW.DUCTECH.COM)