


Click Here to Request Quote

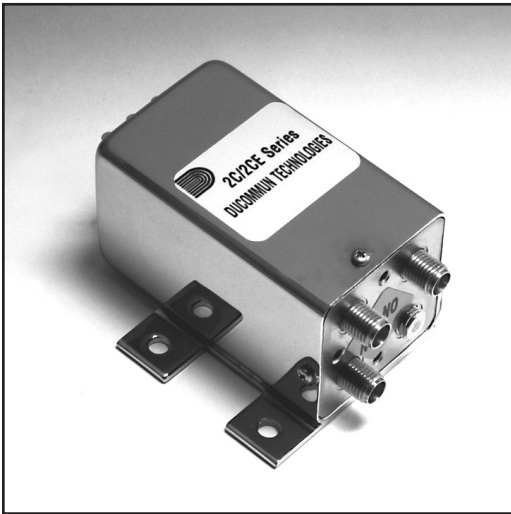

The **2C Series** features SMA connectors and a frequency range of DC to 18 GHz.

The **2CE Series** also features SMA connectors and a frequency range of DC to 26.5 GHz.

Both series are available with fail-safe, latching self cut-off, or pulse latching functions.

Weight (max.):	6 oz
RF Impedance:	50 ohms nominal
Operating Temperature:	-25°C to +65°C ambient
Operating Life:	1,000,000 cycles min.
Switching Sequence:	Break Before Make

SPECIFICATIONS

Frequency	VSWR (max.)	Insertion Loss (dB max.)	Isolation (dB min.)
DC-4 GHz	1.20	0.20	80
4-8 GHz	1.30	0.30	75
8-12 GHz	1.40	0.40	70
12-18 GHz	1.50	0.50	60
18-26.5 GHz	1.50	0.50	60

Actuator Current (typical)	12Vdc	15 Vdc	24 Vdc	28Vdc
Fail-safe	375mA	300mA	180mA	170mA
Latching	335mA	270mA	180mA	165mA

* If reduced coil current is required, please contact Factory.

Position	NO	NC	Latching
Switching Time - mSec (Max)	15	35	20

AVAILABLE OPTIONS

OPTION 3 VOLTAGE	OPTION 4 ACTUATOR		OPTION 5 POLARITY
1 - 12 Vdc	Fail-safe		1 - Negative
2 - 28 Vdc	A - Standard	C - Indicators	2 - Positive
3 - 15 Vdc	B - Diodes	D - Diodes, Indicators	3 - Not Applicable
5 - Other	Low Input Drivers with:		OPTION 6 TERMINALS
6 - 24 Vdc	E - Diodes	EH - Diodes	
7 - 5 Vdc	F - Diodes, Indicators	FH - Diodes, Indicators	1 - Solder Terminals
	Latching Self Cut-Off		3 - Other (Specify)
	G - Diodes	H - Diodes, Indicators	4 - Sub Miniature D-Shell Connector
	Low Input Drivers with:		
	J - Diodes	JH - Diodes	
	K - Diodes, Indicators	KH - Diodes, Indicators	
	High Input Drivers with:		
	T - Standard		
	U - Diodes		
	V - Indicators		
	W - Diodes, Indicators		

ADDITIONAL OPTIONS

OPTION 7 STANDARD OPTIONS
1 - Moisture Seal
2 - High Temperature (125° C)
3 - Moisture Seal & High Temperature (125° C)
OPTION 8 BRACKETS
D - See Page 145
E - See Page 145
F - See Page 145
OPTION 9 BODIES
T - See Page 147


Please Note: Schematics may include optional Indicator Contacts. If your Actuator Option does not include Indicator Contacts, omit them from the schematic.

For "Additional Options" please contact Factory for part number

2C/2CE


Option 2 Series	Option 3 Voltage	Option 4 Actuator	Option 5 Polarity	Option 6 Terminals
------------------------	-------------------------	--------------------------	--------------------------	---------------------------

TOP VIEW





Actual markings will reflect terminal functions, not letter or number designation as shown above.

FRONT VIEW

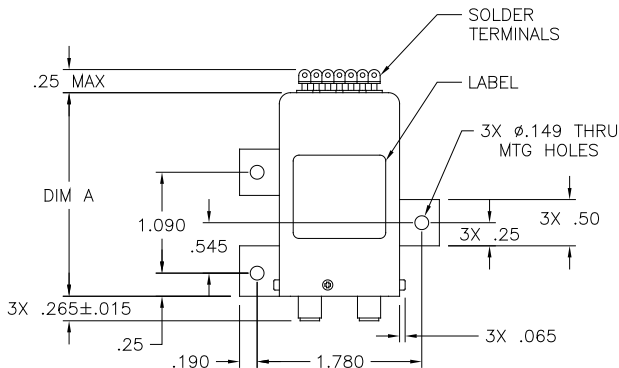

BOTTOM VIEW

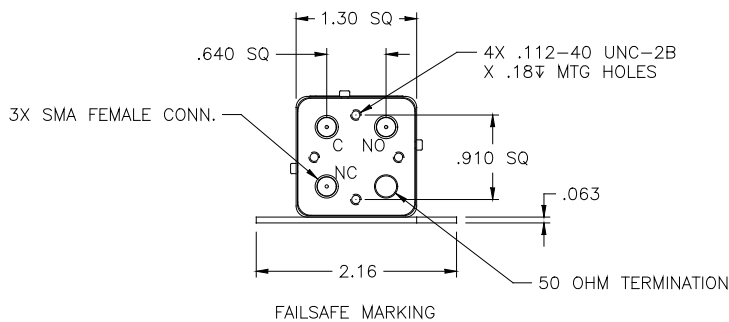

DC TERMINAL FUNCTIONS

PIN	FAILSAFE			LATCHING		
	A, C	B, D	E, EH, F, FH	G, H	J, JH, K, KH	T, U, V, W
1	N/A	N/A	N/A	C+/-	C RTN	C+/-
2	AV	AV+	C RTN	N/A	+ V SW	N/A
3	AV	AV-	+V SW	AV 2-/+	L 2	PV 2-/+
4	N/A	N/A	L	AV 1-/+	L 1	PV 1-/+

SCHEMATICS

Pages 132-137

	S10	S11	S12	S13	S14	S15, S16

INDICATORS

PIN	A	B	C
	COM	1 or N/C	2 or N/O

See Page 158 for Legend of Terms and tolerances

See Page 138 for Logic & BCD Truth Table

AVAILABLE OPTIONS*

OUTLINE DRAWING DIMENSION "A"

A, B, C, D	1.75
E, EH, F, FH	2.25
J, JH, K, KH	2.00
G, H, V, W	1.75
T, U	1.50

* Consult factory for Dimension "A" when multi-pin connector is desired.