


**D1 SERIES
SPDT 50 OHM
TERMINATED SWITCH
DC-22 GHz ◆ SMA**

**Click Here to
Request Quote**

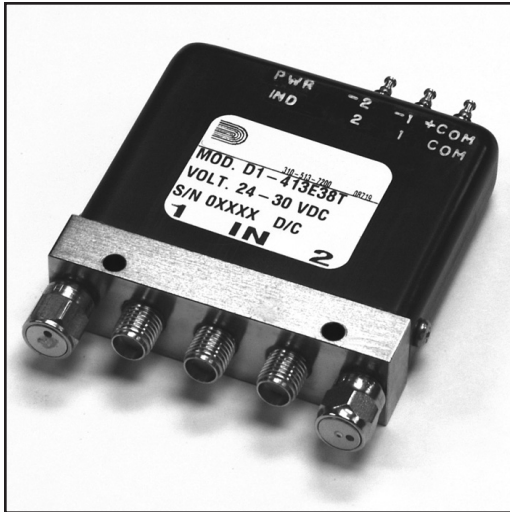

The **D1 Series** features SMA connectors and a frequency range of DC to 22 GHz.

This series is available with fail-safe, latching self cut-off or pulse latching functions.

RF Impedance:	50 ohms nominal
Temperature Range:	-35°C to +85°C ambient
Operating Life:	1,000,000 cycles min.
Switching Time:	15 mSec max.
Switching Sequence:	Break Before Make
Environmental:	Designed in Accordance to MIL-DTL-3928 (Testing and Operation Modes)

SPECIFICATIONS

Frequency	VSWR (max.)	Insertion Loss (dB max.)	Isolation (dB min.)
DC-3 GHz	1.20	0.20	80
3-8 GHz	1.30	0.30	70
8-12.4 GHz	1.40	0.40	60
12.4-18 GHz	1.50	0.50	60
18-22 GHz	1.60	0.60	55

Actuator Current (typical)	12Vdc	12-15 Vdc	20-24 Vdc	24-30Vdc
Fail-safe	480mA	600mA	400mA	280mA
Latching	282mA	353mA	218mA	175mA

* If reduced coil current is required, please contact Factory.

AVAILABLE OPTIONS

OPTION 2 RF CONNECTORS	OPTION 4 VOLTAGE	OPTION 5 ACTUATOR	OPTION 6 FREQUENCY	OPTION 8 SPECIAL OPTIONS
4 - SMA	1 - 6 Vdc +/- 10% 2 - 12 Vdc +/- 10% 3 - 24-30 Vdc 4 - 48 Vdc +/- 10% 5 - 110 Vac +/- 10% 6 - 12-15 Vdc 7 - 18-20 Vdc 8 - 20-24 Vdc	Fail-safe	5 - DC to 22 GHz	L - TTL (High) LL - TTL (Low) T - External Termination OT - Internal Termination
		A - Standard B - Indicators M - Diodes Q - Diodes, Indicators		
OPTION 3 TERMINALS		Latching Self Cut-Off	OPTION 7 POLARITY	
		D - Diodes E - Diodes, Indicators		
1 - Solder Terminals 4 - Sub M miniature D-Shell Connector		Pulse Latching	0 - Not Applicable 8 - Positive Common 9 - Negative Common	
		C - Standard F - Indicators Y - Diodes L - Diodes, Indicators		
		Normally Open		
		K - Standard H - Indicators J - Diodes G - Diodes, Indicators		

D1

-

4

5

Option 1
Series

Option 2
RF Connectors

Option 3
Terminals

Option 4
Voltage

Option 5
Actuator

Option 6
Frequency

Option 7
Polarity

Option 8
Special
Options

DC TERMINAL FUNCTION

PIN	FAILSAFE							LATCHING							NORMALLY OPEN					
	A	M	A, M w/ TTL	B	Q	B, Q w/ TTL	C, Y	C, Y w/ TTL	D	D w/ TTL	E	E w/ TTL	F, L	F, L w/ TTL	J	K	J, K w/ TTL	G	H	G, H w/ TTL
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	2	N/A	2	N/A	2	N/A	2	N/A	N/A	2	N/A	N/A	2
2	N/A	N/A	2	2	2	2	2-/+	1	2-/+	1	2-/+	1	2-/+	1	2-/+	2	1	2-/+	2	1
3	1	+1	-B	1	1	-B	1-/+	-B	1-/+	-B	1-/+	-B	1-/+	-B	1-/+	1	-B	1-/+	1	-B
4	2	-2	+A	COM	COM	+A	COM+/-	+A	COM+/-	+A	COM+/-	+A	COM+/-	+A	COM+/-	COM	+A	COM+/-	COM	+A
5	N/A	N/A	N/A	N/A	N/A	2	N/A	N/A	N/A	N/A	2	2	2	2	N/A	N/A	N/A	2	2	2
6	N/A	N/A	N/A	2	-2	1	N/A	N/A	N/A	N/A	1	1	1	1	N/A	N/A	N/A	1	1	1
7	N/A	N/A	N/A	1	+1	COM	N/A	N/A	N/A	N/A	COM	COM	COM	COM	N/A	N/A	N/A	COM	COM	COM

SCHEMATICS


Pages 139-143

FIG.	5	5	6	5	5	6	17	18	11	12	11	12	17	18	23	23	24	23	23	24
------	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----


OUTLINE DRAWING DIMENSION "A"

1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"	1.98"
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------


**FRONT VIEW
Internal Terminations**



TOP VIEW



**FRONT VIEW
External Terminations**

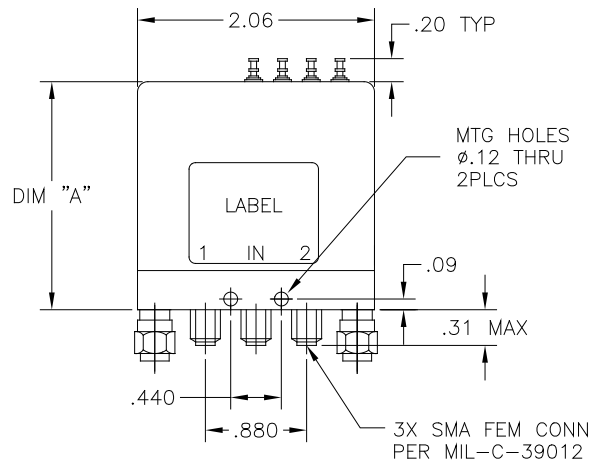

SIDE VIEW

