


INT/INTE SERIES
1P3T to 1P6T
MULTI POSITION SWITCH
DC-22 GHz ◆ SMA

Click Here to
Request Quote

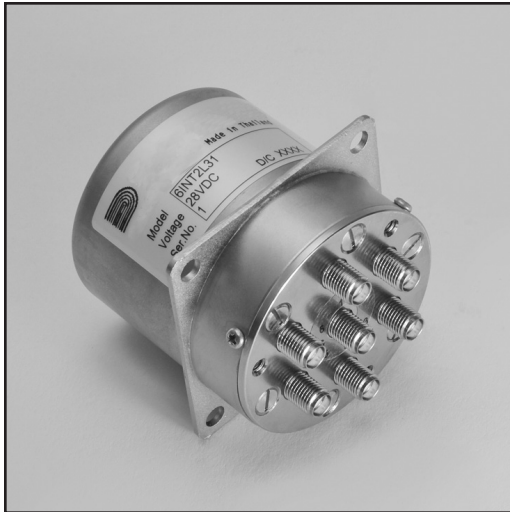

The **INT Series** features SMA connectors and a frequency range of DC to 18 GHz.

The **INTE Series** also features SMA connectors and a frequency range of DC to 22 GHz.

Both series are available with normally open, latching self cut-off, or pulse latching functions.

Weight (max.):	10 oz
RF Impedance:	50 ohms nominal
Operating Temperature:	-25°C to +65°C ambient
Operating Life:	1,000,000 cycles min.
Switching Sequence:	Break Before Make

SPECIFICATIONS

Frequency	VSWR (max.)	Insertion Loss (dB max.)	Isolation (dB min.)
DC-4 GHz	1.20	0.30	75
4-8 GHz	1.30	0.35	70
8-12 GHz	1.40	0.40	65
12-18 GHz	1.50	0.50	60
18-22 GHz	1.60	0.60	60

Actuator Current (typical)	12Vdc	15 Vdc	24 Vdc	28Vdc
Latching	300mA	240mA	160mA	145mA
Normally Open	380mA	295mA	190mA	170mA

* If reduced coil current is required, please contact Factory.

Position	NO	NC	Latching
Switching Time - mSec (Max)	15	35	20

AVAILABLE OPTIONS

OPTION 3 VOLTAGE	OPTION 4 ACTUATOR		OPTION 5 POLARITY
1 - 12 Vdc*	Latching Self Cut-Off		1 - Negative
2 - 28 Vdc	G - Diodes	H - Diodes, Indicators	2 - Positive
3 - 15 Vdc*	GY - Diodes with USB	HY - Diodes, Indicators/ with USB	3 - Not Applicable / USB
5 - Other	Low Input Drivers with:	High Input Drivers with:	OPTION 6 TERMINALS
6 - 24 Vdc	J - Diodes	JH - Diodes	
7 - 5 Vdc	K - Diodes, Indicators	KH - Diodes, Indicators	1 - Solder Terminals
	JB - B C D, Diodes	JBH - B C D, Diodes	2 - Circular Connector
	KB - B C D, Diodes, Indicators	KBH - B C D, Diodes, Indicators	3 - Other (Specify) / USB
	Pulse Latching		4 - Sub Miniature D-Shell Connector
	T - Standard	R - Diodes	
	U - Diodes	S - Diodes, Indicators	
	V - Indicators	RB - B C D, Diodes	
	W - Diodes, Indicators	SB - B C D, Diodes, Indicators	
		N - Indicators	
		M - Diodes	
		P - Diodes, Indicators	
		MY - Diodes with USB	
		HY - Diodes, Indicators / with USB	

ADDITIONAL OPTIONS

OPTION 7 STANDARD OPTIONS
1 - Moisture Seal
2 - High Temperature (125° C)
3 - Moisture Seal & High Temperature (125° C)
OPTION 8 BRACKETS
A - See Page 144


Please Note: USB integration can only be applied to Voltage Options 5Vdc, 12Vdc, & 15Vdc, Polarity Option # 3, and Terminals Option # 3. Schematics may include optional Indicator Contacts. If your Actuator Option does not include Indicator Contacts, omit them from the schematic.

For "Additional Options" please contact Factory for part number

INT/INTE


Option 1 Positions	Option 2 Series	Option 3 Voltage	Option 4 Actuator	Option 5 Polarity	Option 6 Terminals
------------------------------	---------------------------	----------------------------	-----------------------------	-----------------------------	------------------------------

TOP VIEW




Actual markings will reflect terminal functions, not letter or number designation as shown above.

FRONT VIEW

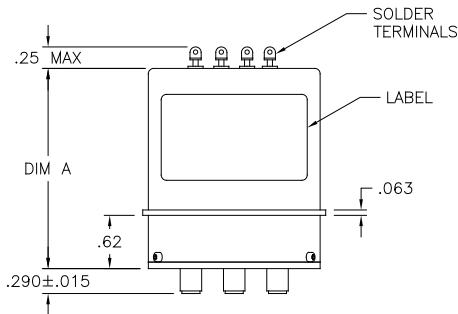

BOTTOM VIEW

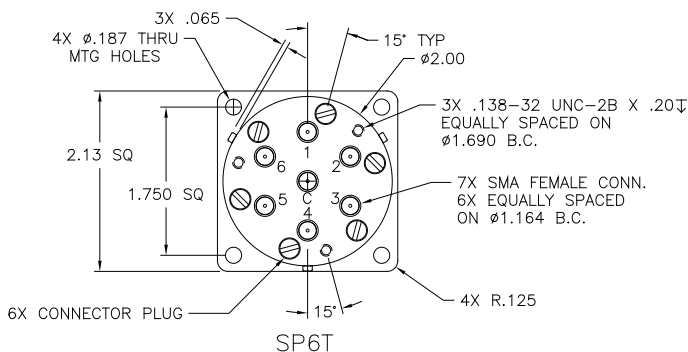

DC TERMINAL FUNCTIONS

PIN	NORMALLY OPEN			LATCHING			
	L, N	M, P	R, RH, RB, RBH, S, SH, SB, SBH	G, H	J, JH, JB, JBH, K, KH, KB, KBH	T, V	U, W
1	C	C+/-	+V SW	C+/-	+V SW	C+/-	C+/-
2	N/A	N/A	C RTN	N/A	C RTN	RESET	N/A
3	AV 1	AV 1-/+	L 1 or B C D 1	AV 1-/+	L 1 or B C D 1	PV 1-/+	PV 1-/+
4	AV 2	AV 2-/+	L 2 or B C D 2	AV 2-/+	L 2 or B C D 2	PV 2-/+	PV 2-/+
5	AV 3	AV 3-/+	L 3 or B C D 4	AV 3-/+	L 3 or B C D 4	PV 3-/+	PV 3-/+
6	AV 4	AV 4-/+	L 4	AV 4-/+	L 4	PV 4-/+	PV 4-/+
7	AV 5	AV 5-/+	L 5	AV 5-/+	L 5	PV 5-/+	PV 5-/+
8	AV 6	AV 6-/+	L 6	AV 6-/+	L 6	PV 6-/+	PV 6-/+

SCHEMATICS

Pages 132-137

M14	M15	M16, M17	M18	M19, M20	M21, M22	M21, M22
-----	-----	----------	-----	----------	----------	----------

INDICATORS


PIN	A	B	C	D	E	F	G
	COM	1	2	3	4	5	6

See Page 158 for Legend of Terms and Tolerances


See Page 138 for Logic & BCD Truth Table

AVAILABLE OPTIONS*	OUTLINE DRAWING DIMENSION "A"
L, T	2.08
G, H, W, U, V	2.33
J, JH, K, KH	2.58
JB, JBH, KB, KBH	2.58
M, N	2.33
P	2.58
R, RB, RBH, RH	2.58
S, SB, SBH, SH	2.58


* Consult factory for Dimension "A" when multi pin connector is desired.



SP3T



SP4T



SP5T